

# Dart Tracker Fitting Guide

Fitting time approx 30 mins



1 Preparation

2 Location

3 Fitting

4 Activation

Tools Required: ZipTies, Cutters, Wire connection tools

## 1 Preparation




- Please note this tracker is not waterproof and needs to be away from any source of heat
- Identify the location of where you will fit the tracker, away from where it can become damaged
- Do not install in metal enclosure as this can affect the GPS Signal (Fibreglass & Glass ok)
- it should not be in direct vision of people entering the vehicle
- The tracker should not impede the operation of the vehicle and all cables must be out of the way of the operator

## 2 Location

- Remove steering column cover
  - Identify permanent power, earth and engine run signal points
- Run wires to above points
- Place LMU the correct way up under the dash
  - Ensure unit is secured (must not move) then put covers back on

3

## Fitting

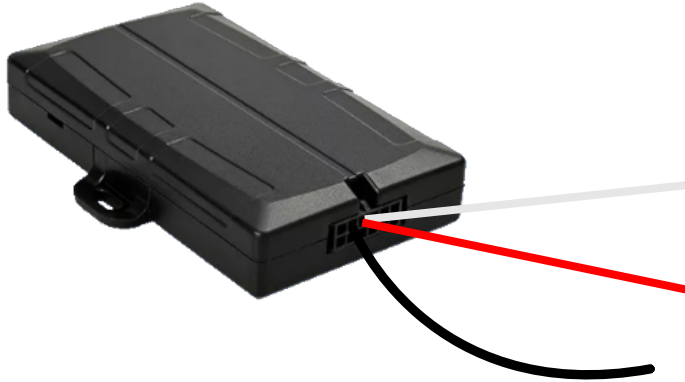

**RED** = Permanent Power (Must be fitted with Max 5A fuse in line)

**BLACK** = Earth

**WHITE** = Engine run (Not ACC)

(Must be fitted with Max 5A fuse in line)

**PINK** = Input 1. This can be used to monitor seatbelt connection, PTO engagement or alternate type of trigger. If no extra monitoring is required leave pink wire free

4

## Activation



- Start the asset and let it run for 5 Minutes
- Turn asset off and scan the QR Code with your phone
- Ensure you have available; Asset Number, Tracker number, Rego, Make/Model/Vin No.
- Follow the steps through the activation app



**Please call 1300 110 248 If you have any issues with the activation for assistance**