

# G70 Tracker Fitting Guide

Fitting time approx 30 mins



1

Location

2

Fitting

3

Activation

Tools Required: Zip-ties, cutters, wire connection tools\*

\*Drill may be required for mounting and removing screws, as well as a multi-meter

1

## Location




- The G70 is a IP68 rated waterproof and IK08 impact protected tracker with a built-in harness.
- Identify the location where you will fit the tracker.
- The tracker should be located away from areas where it can become damaged (Heat etc)
- G70 must have no metal obstruction between the box and the sky for best results.
- The tracker should not impede the operation of the vehicle and all cables must be out of the way of the driver/operator.
- Should be hidden as best as possible out of sight.

## 2

## Fitting



- Wires:
  - Red (Pin 1) = Permanent Power – connects to battery positive
  - Black (Pin 2) = Ground – connects to battery negative
  - (Optional) White (Pin 3) = ignition - Connected to alternator signal wire or ignition position “Engine on” (Indicated engine is running).
- \*Please note the white wire is optional. If you choose to not use it, please notify TFO with an on and off battery voltage reading as a script change will need to be made.

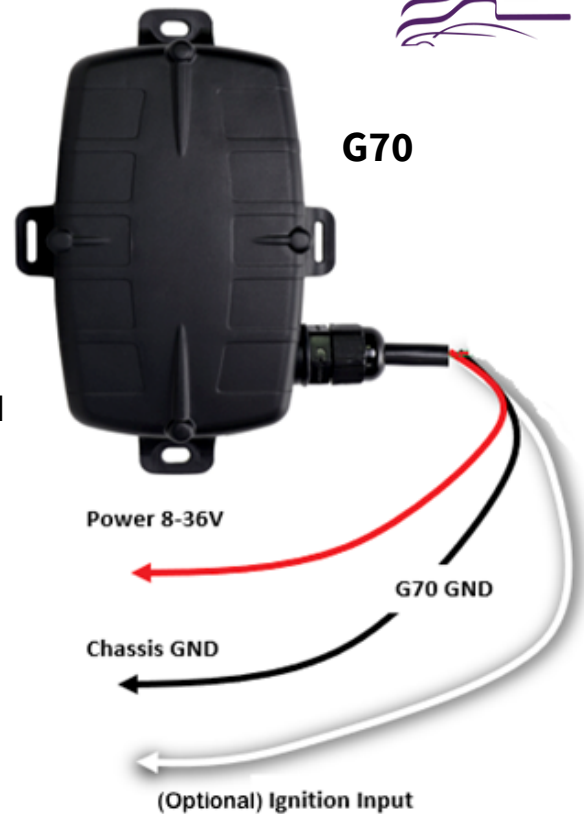

## 3

## Activation



- Start asset and let it run for 5 mins (If no white wire was used, please call 1300 110 248 and select option 1 to change the script)
- Ensure you have available; Asset Number, Tracker number, Rego, Make/Model/Vin No.
- Turn asset off and scan the QR code with your phone
- Follow the steps through the activation app
- You will need the assets details and the tracking number to complete the activation. If the asset already exists in the system, please search for an existing asset, otherwise select 'add new'.



**Please call 1300 110 248 If you have any issues  
with the activation for assistance**